arXiv:1412.3064v1 [q-bio.NC] 8 Dec 2014

Homomorphisms of connectome graphs

Peteris Daugulis
Department of Mathematics
Daugavpils University
Daugavpils, Latvia
peteris.daugulis@du.lv

December 10, 2014

Abstract

We propose to study homomorphisms of connectome graphs. Homomorphisms can be studied as sequences of elementary homomorphisms - folds, which identify pairs of vertices. Several fold types are defined. Initial computation results for some connectome graphs are described.

Contents

1 Introduction **2**

1.1 Setup 2

1.1.1 The subject of study 2

1.1.2 Graph homomorphisms 3

1.1.3 Main objectives and steps of our work 5

2 Main results **6**

2.1 Types of elementary homomorphisms 6

2.2 Fold sequences 9

2.3 Some examples 9

2.3.1 Cat 9

2.3.2 Worm 10

2.3.3 Macaque 10

2.3.4 Fly 11

2.4 Conclusion 11

1 Introduction

1.1 Setup

1.1.1 The subject of study

Connectome graphs are important discrete mathematical models used for modelling nervous systems on different scales, see [4], [5], [6]. In this paper we are mainly interested in graph-theoretic problems and computations therefore we do not deal with connectome scale and other modelling issues. For simplicity of language we assume that we work on microscale - graph model vertices are neurons (nerve cells) and edges are neuron connections (e.g. synapses). Edges may be directed, undirected and labelled. We use data available at http://www.openconnectomeproject.org. We only consider the directed graph structure of connectomes, the edge weights and labels are not used.

1.1.2 Graph homomorphisms

We remind the reader basic definitions from graph theory, see [1]. A graph is a visualization of a relation - a pair $\Gamma = (V, E)$, where V is a set and $E \subseteq V \times V$. An edge from vertex u to vertex v is a pair $[u, v] \in E$. Directed graphs have ordered pairs. $\Gamma_+(v)$ is the set of vertices having edges out of v, $\Gamma_-(v)$ is the set of vertices having edges into v. If $\Gamma = (V, E)$ is a graph and there is a partition π of V: $V = \bigcup_i V_i$, then a *quotient graph mod* π denoted as Γ/π is the graph with vertex set $\{V_i\}$, two elements of the partition are connected if and only if there is an edge between some two vertices in the corresponding partition subsets.

We consider connectome graphs as being directed loopless graphs.

Given two graphs $\Gamma_1 = (V_1, E_1)$ and $\Gamma_2 = (V_2, E_2)$, a function $f : \Gamma_1 \to \Gamma_2$ or $f : V_1 \to V_2$ is called a *graph homomorphism* provided $[u, v] \in E$ implies $[f(u), f(v)] \in E$. In other words, edges are mapped to edges and their directions are preserved. Any homomorphism is equivalent in a certain sense to a homomorphism $\Gamma \to \Gamma/\pi$ for some partition π and thus can be thought as an identification of some vertices and edges of Γ. The homomorphisms capture the notion of maps preserving graph structure. Homomorphisms $\Gamma \to \Gamma$ are called Γ-endomorphisms. Noninjective homomorphisms preserve graph structure and decrease the number of vertices. Thus homomorphisms may be used to analyze big graphs such as connectome graphs.

An Γ-endomorphism $f : \Gamma \to \Gamma$ is called a *retracting endomorphism* and $Im(\Gamma)$ - a retract, provided $f|_{Im(\Gamma)} = id$. In other words, $Im(\Gamma)$ is fixed by f and $f \circ \iota = id$, where ι is the inclusion of $Im(\Gamma)$ into Γ.

Another type of maps which preserve graphs structure are graph isomorphisms. Isomorphisms are bijective maps - essentially relabelings of vertices.

It seems that relabelings can not significantly help to understand structure of big graphs. In graph theory relabelings are used to design normal forms of graphs. Additionally, it is quite unlikely that two different connectome graphs would have identical structure. It would interesting to find such a biological phenomenon, but it is not within the scope of our work. On the other hand, it is likely that homomorphic images of certain connectome subgraphs are isomorphic (essential structure of certain tissues etc. may be identical), thus both homomorphisms and isomorphisms should be studied.

We call a graph homomorphism $f : \Gamma_1 \to \Gamma_2$ *terminal* if there is no noninjective homomorphism $\Gamma_2 \to \Gamma_3$. In other words, terminal homomorphisms cannot be composed with other noninjective homomorphisms. Vaguely speaking, if we consider homomorphisms as graph simplifications, the graph Γ_2 cannot be simplified further. Images of terminal homomorphisms are called *terminal graphs*.

In case of undirected graphs terminal graphs are called *cores*. The core of an undirected or directed graph is determined uniquely up to isomorphism, see [2].

For undirected graphs terminal homomorphisms map graphs to complete graphs. The minimal c such that there is a homomorphism $\Gamma \to K_c$ is called the chromatic number of Γ.

It is known that homomorphisms of undirected graphs can be factored as sequences of *elementary homomorphisms* (which identify nonadjacent vertices) or *simple folds* (which identify nonadjacent vertices having a common neighbour), see [2], [3]. In this paper we define several types of elementary homomorphisms of directed graphs.

1.1.3 Main objectives and steps of our work

In the published literature connectome graphs are studied as fixed objects. Some of the main directions of graph-theoretic study are related to 1) probabilistic graph theory - connectome graphs are compared to random graphs, 2) network analysis - various "network" invariants, for instance, centrality invariants, are studied, vertices having extremal invariant values ("rich club") are identified, 3) small subgraph analysis - motifs characteristic for connectomes are identified and 4) graph decompositions - subgraphs having special properties are indentified.

We propose to study simplified connectome graphs - to study images of connectome graphs under noninjective homomorphisms - maps preserving adjacency of vertices and decreasing the number of vertices. We also express noninjective homomorphisms as sequences of vertex identifications. In other terms, we propose to study quotient graphs of connectome graphs.

The main objective of our work is to compute terminal connectome graph homomorphisms and endomorphisms for some connectome graphs and discuss the results.

The main steps of our work: 1) definition of 5 types of elementary homomorphisms - folds, 2) computation of graph invariants of the initial connectome, 3) computation of terminal sequences of folds of each of the 5 types, 4) computation of graph invariants of the obtained terminal graphs.

2 Main results

2.1 Types of elementary homomorphisms

In this paper we introduce several types of elementary graph homomorphisms - *folds* and study sequences of folds. A fold is a graph homomorphism which identifies two vertices. Furthermore, the following edges are identified: edges which have common sources and point to identified vertices and edges which go from identified vertices and have common targets. We propose the following fold types which can be considered as connectome simplification steps.

Definition 2.1.1. A graph homomorphism is called a *forward fold* if it identifies two nonadjacent vertices u and v of Γ (substitutes u and w by a new vertex w) such that there is a vertex x having properties $u \to x$ and $v \to x$. It corresponds to the identification of two neurons u and v which have a common synapse target neuron x. See Fig.1.

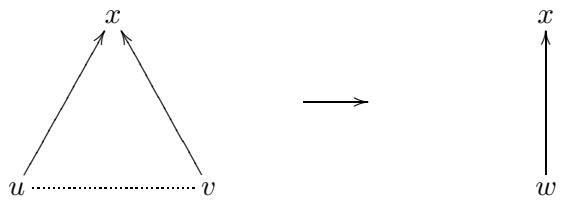

Fig.1. - forward fold

Definition 2.1.2. A graph homomorphism is called a *backward fold* if it identifies two nonadjacent vertices u and v of Γ such that there is a vertex y having properties $y \to u$ and $y \to v$. It corresponds to the identification of two neurons u and v which have a common synapse source neuron y. See Fig.2.

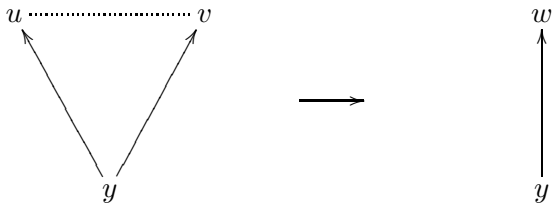

Fig.2. - backward fold

Definition 2.1.3. A graph homomorphism is called a *disjunctive fold* if it identifies two nonadjacent vertices u and v of Γ such that there is either a vertex x having properties $u \to x$ and $v \to x$ or a vertex y having properties $y \to u$ and $y \to v$. It corresponds to the identification of two neurons u and v which have either a common synapse target or source.

Definition 2.1.4. A graph homomorphism is called a *conjunctive fold* if it identifies two nonadjacent vertices u and v of Γ such that there is a vertex x having properties $u \to x$, $v \to x$, $x \to u$ and $x \to v$. It corresponds to the identification of two neurons u and v which have a common synapse target and source neuron x.

Definition 2.1.5. A graph homomorphism is called a *retractive fold* if it identifies two nonadjacent vertices u and v of Γ such that $\Gamma_+(u) \subseteq \Gamma_+(v)$ and $\Gamma_-(u) \subseteq \Gamma_-(v)$. The image of a retractive fold $\Gamma \to \Gamma'$ can be thought as a subgraph of Γ, a composition of retractive folds can be thought as a retractive endomorphism. See Fig.3. for an example.

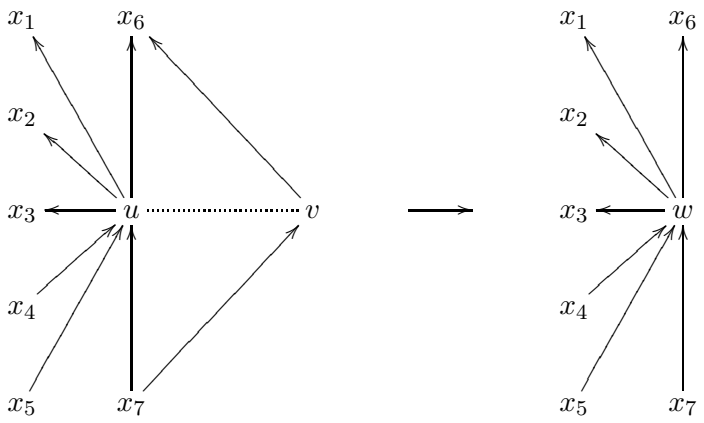

Fig.3. - retractive fold

Remark 2.1.1. Computation of a sequence of retractive folds in an arbitrary way does not guarantee that the terminal graph will be a core.

Proposition 2.1.1. *Images of folding homomorphisms defined above have following properties:*

1. *the only induced cycles of terminal graphs are oriented cycles and (arbitrarily oriented) triangles;*

2. *folds preserve strong connectivity.*

We also propose a fold type which, apart from identifying vertices, change edge weights. If two vertices are identified as well as edges having a common vertex then it is natural to increase weights of edges after identification. In this paper there are no computational results for this fold type. To consider these folds we assume that connectome graphs are weighted graphs - edges have integer weights. Edge weight can be interpreted as connection significance.

Definition 2.1.6. Let Γ be a weighted graph. A graph homomorphism is called an *edge fold* if

1. it has type of one of the previously defined folds,

2. if the fold identifies vertices u and v creating a new vertex w, then edges $u \xrightarrow{f} x$ and $v \xrightarrow{g} x$ after identification give rise to the edge $w \xrightarrow{f+g} x$, similarly for ingoing edges.

2.2 Fold sequences

Given a connectome graph and a chosen fold type we perform a maximal sequence of consecutive folds until no further fold is possible. The order of folds is arbitrary. In the end we get a *terminal graph*.

2.3 Some examples

In this subsection we describe some of our computational results. All connectome graphs with number of vertices not exceeding 2000 can be processed on a standard laptop computer.

2.3.1 Cat

Filename - Mixed.species_brain_1.graphml.
Initial graph description - strongly connected graph with 65 vertices and 1139 edges, underlying undirected graph has vertex connectivity 6, diameter 3, radius 2, center has 23 vertices, minimal degree 3, maximal degree 45, degree sequence $[0,0,0,1,1,1,\ 0,0,0,1,3,0,4,\ 1,2,3,2,5,\ 1,2,2,3,2,2,3,4,$ 4, 2, 0, 1, 1, 2, $1,1,1,\ 2,1,0,1,1,0,\ 0,1,0,1,2]$.

Forward, backward, disjunctive and conjunctive folding terminal graph description - strongly connected graph with 17 vertices, underlying undirected graph is the complete graph K_{17}.

Retract folding terminal graph description - strongly connected graph with 61 vertices, 1102 edges, connectivity 9, diameter 3, radius 2, minimal degree 9, maximal degree 44.

2.3.2 Worm

Filename - c.elegans.herm_pharynx_1.graphml.

Initial graph description - 279 vertices and 2993 edges, 6 strongly connected components - one with 274 vertices and the other trivial components (1-vertex components), underlying undirected graph has vertex connectivity 2 (5 saparation pairs, 11 maximal 3-connected components), diameter 5, radius 3, center has 84 vertices, minimal degree 2, maximal degree 93, degree sequence $[0, 0, 5, 3, 4, 4, 13, 15, 14, 17, 21, 12, 16, 20, 15,\ 14, 11,$ $9, 7, 6, 6, 7, 9, 3, 11\ ,\ 4, 1, 2,\ 3, 3, 1, 2, 1, 3, 3, 0, 1, 0, 1, 1, 0,\ 0, 0, 0, 1, 0, 0, 0,\ 0, 0, 1,$ $0, 0, 1, 1, 2, 1,\ 0, 0,\ 0, 0, 0, 0, 0,\ 0, 0, 0, 0, 0, 0\ ,\ 0, 0, 0\ ,\ 0, 0, 0, 1, 1, 0, 0, 0, 0, 0, 0,\ 0, 0, 0,$ $0, 0, 0, 0, 0, 0, 0, 1,\ 1]$.

Forward, backward, disjunctive and conjunctive folding terminal graph description - 14, 17, 13, 21 vertices, respectively.

Retract folding terminal graph description - strongly connected graph with 254 vertices.

2.3.3 Macaque

Filename - rhesus_brain_1.graphml.

Initial graph description - 242 vertices and 4090 edges, strongly connected,

underlying undirected graph has vertex connectivity 1 (3 cutvertices, 8 separation pairs), diameter 4, radius 3, center has 147 vertices, minimal degree 1, maximal degree 111, degree sequence [0, 7, 8, 7, 4, 10, 4, 0, 7, 6 , 3, 3, 5, 8, 2, 4, 6, 9, 12, 3, 7, 5, 4, 7, 6, 5, 5, 4, 5, 3, 4, 4, 3, 4, 4, 1, 6, 2, 2, 7, 2, 7, 1, 2, 2, 0, 1, 1, 5, 1, 1, 1, 0, 3, 1, 0, 1, 0, 0, 1, 2, 1, 1, 1, 1, 0, 1, 2, 1, 0, 0, 1, 0, 0, 2, 0, 1, 0, 0, 1, 0, 0, 0

vertices it is possible to compute basic invariants characterizing graph structure in several minutes on a typical 2010s laptop computer. A transition to quotient graphs (as well as a transition to subgraphs) may be helpful for understanding operation of nervous systems.

Some of our observations (related to both initial connectome graphs and terminal graphs):

1. most connectomes graphs have one big strongly connected component (SCC) (containing a directed cycle) and an acyclic part, there are strongly connected examples;

2. vertex connectivity of connected components of underlying undirected graphs varies, connectivity is higher for graphs denoted as "brain", connectivity of terminal graphs is bigger or equal to the initial connectivity;

3. diameter of connected components of underlying undirected graphs is predominantly small (at most 6), terminal graphs have diameter smaller or equal to the initial diameter;

4. folds reduce the size of big SCC, the number of SCC changes insignificantly (stays constant or increases by 1);

Further work can be done in the following directions:

1. interpret the computational results in biological and modelling terms;

2. introduce constraints or preferences for possible fold types and folding sequences using additional arguments about graph structure, edge weights and labels as well as other biological information, for example,

we can first identify pairs of vertices which has the maximal number of common positive or negative neighbours;

3. study edge folds;

4. relate the known properties of "rich club" (various centrality invariants) in terms of terminal graph structures;

5. study structure of strongly connected components of connectomes and their images under homomorphisms.

References

[1] Diestel, R (2010) Graph Theory. *Graduate Texts in Mathematics*, Vol.173, Springer-Verlag, Heidelberg,

[2] Godsil, Chris, Royle, Gordon F. (1001) Algebraic Graph Theory *Graduate Texts in Mathematics*, Vol. 207, 443, Springer.

[3] Hahn, Gena, Tardif, Claude (1997). Graph homomorphisms: structure and symmetry, *Graph Symmetry NATO ASI Series*, V.497, pp.107–166.

[4] Kaiser, Marcus (2011). A Tutorial in Connectome Analysis: Topological and Spatial Features of Brain Networks. *Neuroimage*, 57, pp.892-907.

[5] Sporns, Olaf (2012). Discovering the Human Connectome, *MIT Press*, ISBN 0-262-01790-3.

[6] Sporns, Olaf (2013). The human connectome: Origins and challenges. *Neuroimage* 80, pp.53-61.